





TRIAx

connecting the future

TV+IF SAT optical transmitter

Solution for the distribution of TV terrestrial and satellite signals through optical fiber

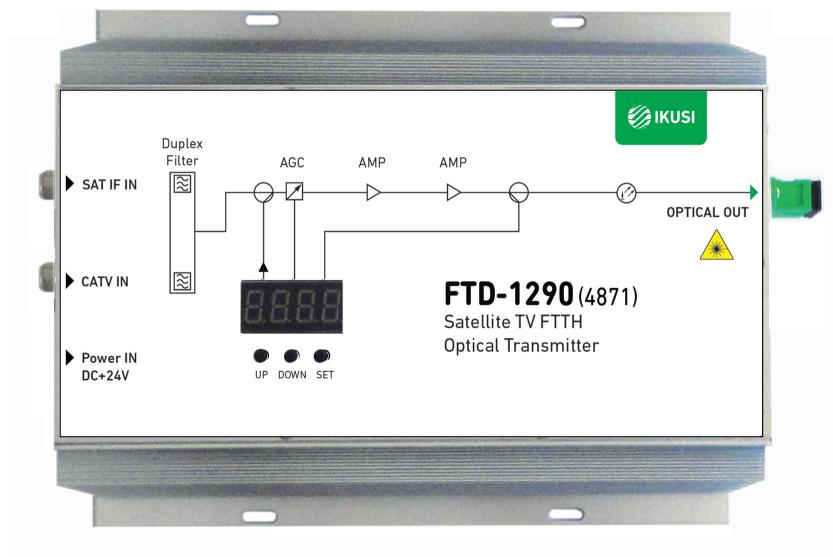

Inputs CATV and SAT-IF



Display optical modulation
settings



Optical output

FTD-1290

Technical specifications

MODEL	FTD-1290	
REF.	4871	
Optical output power	mW	10 (± 10 dBm)
RF inputs		2 TV (45-862 MHz) ; IF (950-2600 MHz)
Optical section		
Optical wavelength	nm	1550 (± 20)
Relative intensity noise (RIN) of the laser	dB/Hz	< -150
Optical output return loss	dB	> 50
Optical output connector		SC/APC 8°
RF section		
TV output level	dB μ V	75 – 85
IF input level	dB μ V	69 – 83
RF flatness	dB	± 0.75 (TV) ; ± 1 (IF)
OMI adjustment level	dB	-5 ... +5
Input impedance	Ω	75
Input return losses	dB	> 16 (TV) ; > 10 (IF)
General		
TV and IF input connectors		F
Power supply		+24 Vdc/150 mA
Dimensions	mm	250 x 150 x 60

Installation example

