


Rejection LTE frequencies

Art. Ref. 1436
Art. Ref. 1437

Optimised for 2nd digital dividend with frequency cut on channel 48

FLTE-481

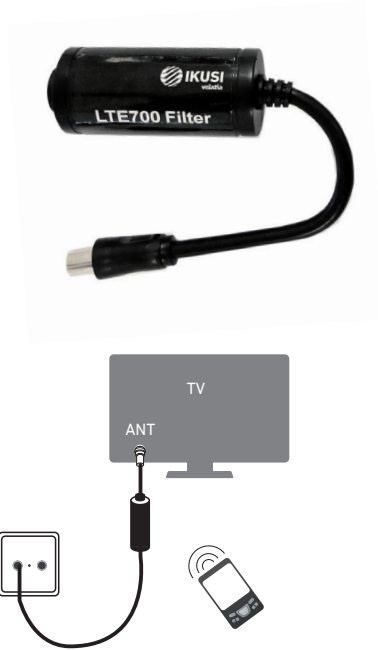

FLTE-482



- Rejection LTE frequencies to 2nd dividend
- 2 models: Interior and exterior
- Bypass in the two models
- Maximum attenuation at LTE frequencies
- High selectivity and minimal losses

MODEL	FLTE-481	FLTE-482	
REF.	1436	1437	
Installation type	Interior	Exterior	
Frequency cut	channel 48		
Passing frequency band	MHz	470 - 694	
Attenuation frequencies LTE	dB	see graphic →	
Insertion losses	dB		
Dimensions	mm	70 x 30ø	55 x 40 x 15 with protective box

