




IKUSI

Cascadable multiswitch 17 inputs

Distribution of 16 SAT-IF polarizations and 1 terrestrial TV signal

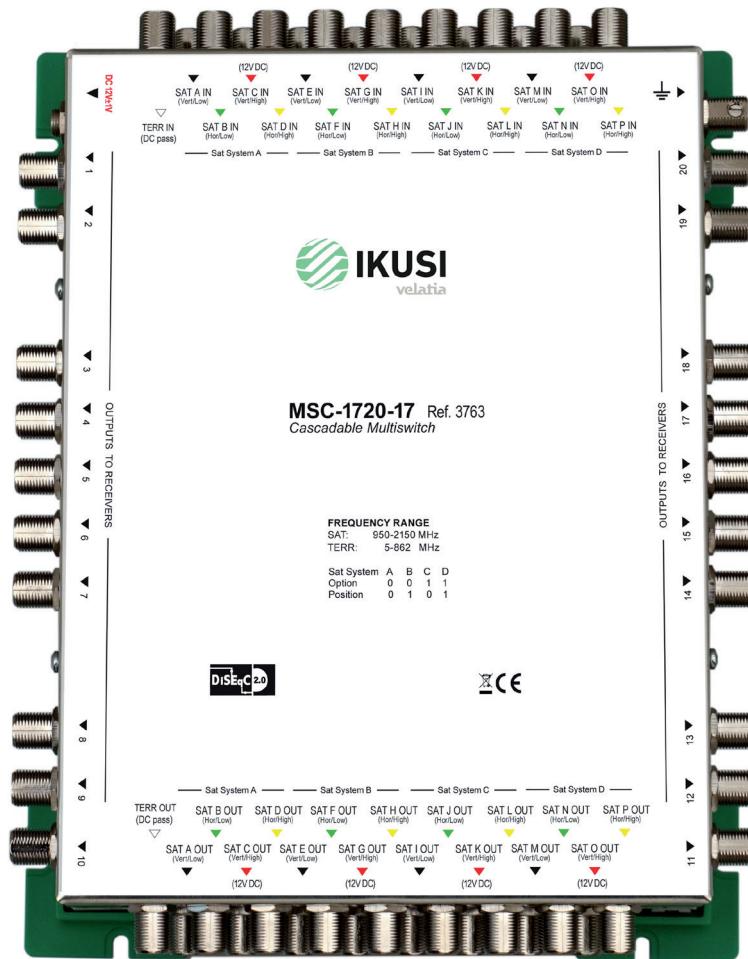

External power supply unit
or from the SAT receiver



Satellite multi-inputs
+ passive terrestrial input




Low insertion loss
on trunk outputs

- Maximum recommended number of user outputs in a single cascade is 64.
- Stepped insertion loss on user outputs.
- Indoor mounting and wall fixing.
- European product.

MODEL	MSC-1706-10	MSC-1706-15	MSC-1710-10	MSC-1710-15	MSC-1716-12	MSC-1716-17	MSC-1720-12	MSC-1720-17
REF.	3756	3757	3758	3759	3760	3761	3762	3763
Number of inputs	17 (16 SAT inputs+1 TERR input)							
Number of outputs	17							
Number of user outputs	6	6	10	10	16	16	20	20
Frequency range SAT	MHz	950 - 2150	950 - 2150	950 - 2150	950 - 2150	950 - 2150	950 - 2150	950 - 2150
Frequency range TERR	MHz	5 - 862	5 - 862	5 - 862	5 - 862	5 - 862	5 - 862	5 - 862
Insertion loss SAT trunk	dB	2	2	2.5	2.5	3	3	3.5
Insertion loss TERR trunk	dB	3	3	4	4	7	7	8
Insertion loss SAT user	dB	10	15	10	15	12	17	12
Insertion loss TERR tap	dB	18	18	22	22	26	26	28
Isolation between V/H polarizations at user output	dB	22	22	22	22	20	20	20
Isolation between bands L/H at user output	dB	22	22	22	22	22	22	22
Isolation between trunk lines	dB	25	25	25	25	25	25	25
Maximum input level SAT	dB _{PV}	105	105	105	105	105	105	105
Maximum input level TERR	dB _{PV}	105	105	105	105	105	105	105
Maximum user output level SAT	dB _{PV}	95	90	95	90	93	88	93
Maximum user output level TERR	dB _{PV}	87	87	83	83	79	79	77
Current consumption from receiver (18V)	mA	100	100	100	100	100	100	100
Operating temperature	°C	-25 ... +60	-25 ... +60	-25 ... +60	-25 ... +60	-25 ... +60	-25 ... +60	-25 ... +60
Dimensions (w x d x h)	cm	18.6 x 14.6 x 5.1	18.6 x 14.6 x 5.1	18.6 x 14.6 x 5.1	18.6 x 24.5 x 5.1			

Application example

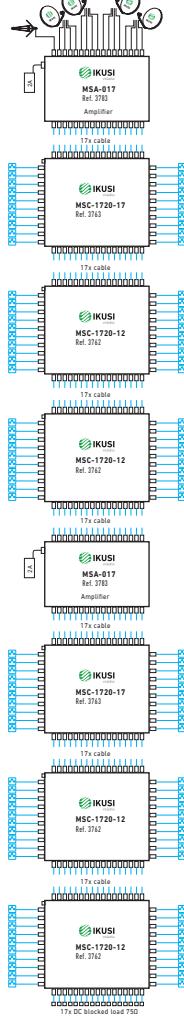

Amplifier

MODEL	MSA-017	
REF.	3783	
Number of inputs	17 (16 SAT inputs+1 TERR input)	
Number of outputs	17	
Frequency range SAT	MHz	950 - 2150
Frequency range TERR	MHz	40 - 862
Gain SAT	dB	25
Gain TERR	dB	22
Isolation between trunk lines	dB	25
Maximum input level SAT	dB _{PV}	90
Maximum input level TERR	dB _{PV}	85
Maximum output level SAT	dB _{PV}	115
Maximum output level TERR	dB _{PV}	107
Current consumption	mA	1350
DC supply voltage	V _{DC}	12
Operating temperature	°C	-25 ... +50
Dimensions (w x d x h)	cm	18.6 x 14.6 x 5.5



Power supply

MODEL	PSA-012
REF.	3784
Input voltage	90-265 AC 50/60 Hz
Output voltage	12 V _{DC}
Maximal output current	2 A
Efficiency	75 %
Operating temperature	-30 ... +50 °C
Dimensions	16 x 6.4 x 5 mm

