

Standalone Multiswitches (v.10)

Data Sheet



www.ikusi.com

MS0904

REF. 1027

MS0908

REF. 1028

MS0912

REF. 1029



MS0916

REF. 1030



- Star distribution of 8 SAT-IF polarizations plus terrestrial to 4, 8, 12 or 16 users.
- MS-09xx multiswitches have a built-in 22 kHz generator which makes possible to send, through the miniature switches on the unit, the command "22kHz" to selected SAT inputs, for High Band continuously.
- Active and passive mode of terrestrial band can be selected by the switches or potentiometer. The return path is available in the passive mode.
- DISEqC 2.0 commands.
- Mains powered. F type connection.
- Indoor mounting. Wall fixing.

		MS-0904	MS-0908	MS-0912	MS-0916
Number of SAT inputs			8		
Number of outputs (users)		4	8	12	16
SAT frequency band	MHz	950 - 2300			
TERR frequency band active/passive	MHz	40-862 / 5-862			
Pertes TERR active/passive	dB	-3/12	0/16	3/18	0/21
Max output level TERR active/passive	dBμV	103/98	100/94	97/92	95/89
Variable attenuator at SAT inputs	dB	0 - 15			
SAT output level (-35dB IMD3, EN 50083-3)	dBμV	80			
Control by 10-14.5/15.5-20 V +0/22 kHz; + ToneBurst		Yes			
Mains voltage (50 Hz)	V _{AC}	110 - 250			
Max consumption	VA	45			
Max LNBs current	mA	1400		1600	
Dimensions	mm	315 x 150 x 80		435 x 150 x 80	

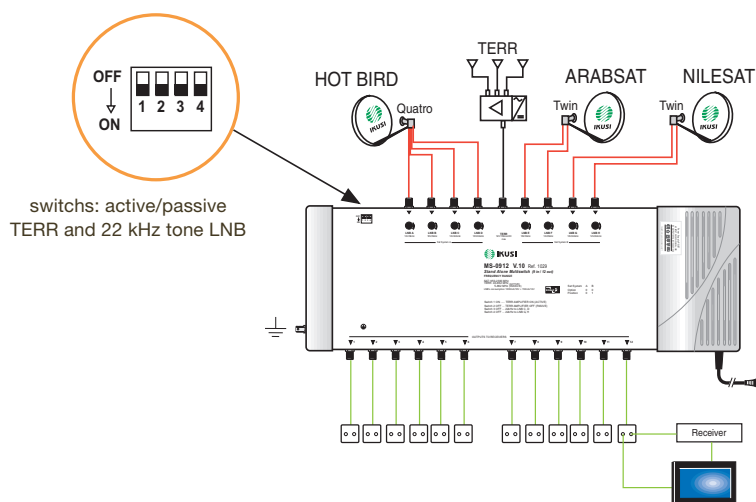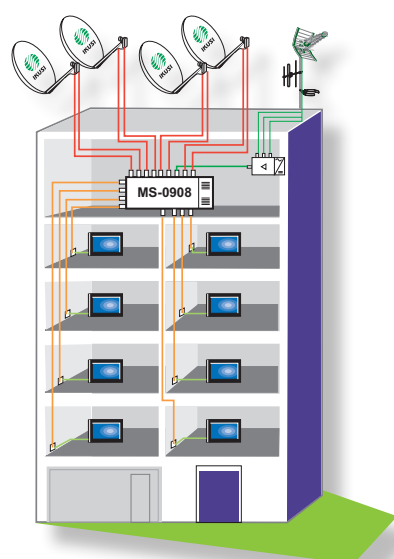

Ángel Iglesias, S.A.
Paseo Miramón, 170
20009 San Sebastián, Spain
Tel. +34 943 44 88 00

Fax +34 943 44 88 20
ikusi@ikusi.com
www.ikusi.com