




Stand Alone Multiswitches 9 inputs (8 sat+1 terr)

A solution for distributing the signals from 1 to 4 satellites for up to 32 users.

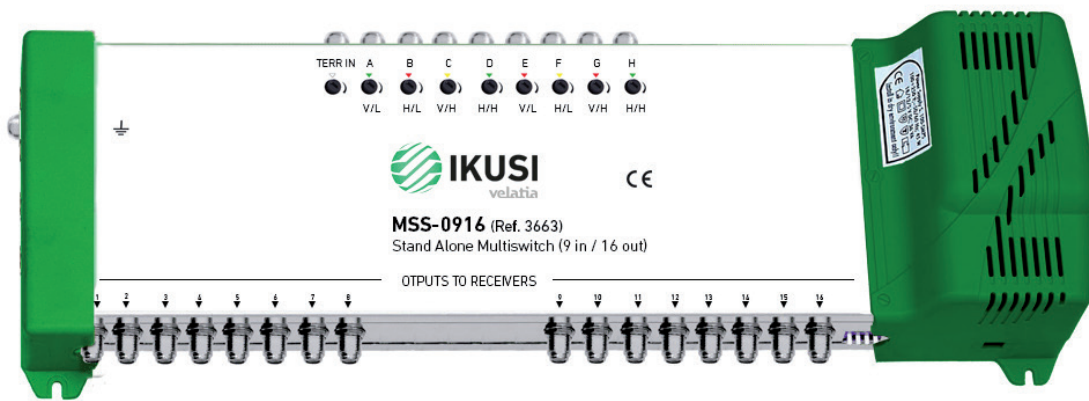

They support DiseqC2.0 commands




Satellite multi-inputs
+ switchable terrestrial input



Distributions up to 32 users

- Distributions up to 32 users.
- All models with integrated power supply except MSS-0932 with external power supply.
- European product.
- Indoor mounting. Wall fixing.

MODEL		MSS-0904	MSS-0908	MSS-0912	MSS-0916	MSS-0920	MSS-0926	MSS-0932
REF.		3660	3661	3662	3663	3664	3665	3666
Number of inputs		9 (8 SAT inputs+1 TERR input)						
Number of outputs (users)		4	8	12	16	20	26	32
Frequency range SAT		MHz 950 - 2300						
Frequency range	TERR active	MHz 40 - 862						
	TERR passive	MHz 5 - 862						
Insertion loss SAT		dB 0	0	0	0	4	5	950 MHz= 8 2150 MHz= +5
Insertion loss	TERR active	dB -3	0	3	5	7	8	5
	TERR passive	12	16	18	21	24	25	27
Isolation between V/H polarizations		dB 20	20	20	20	20	20	25
Isolation between L/H bands		dB 25	25	25	25	25	25	30
Maximum input level SAT		dBμV 90	90	90	90	90	90	85
Max input level	TERR active	dBμV 90	90	90	90	90	90	90
	TERR passive	100	100	100	100	100	100	110
Maximum output level SAT		dBμV 90	90	90	90	86	85	85
Max output level	TERR active	dBμV 93	90	87	85	83	82	85
	TERR passive	88	84	82	79	76	75	83
Current consumption from each receiver		mA 50	50	50	50	50	50	70
Power supply consumption	TERR active	W 4,5	4,5	4,5	4,5	4,5	4,5	13
	TERR passive	3	3	3	3	3	3	11
Input voltage		VAC 90 - 265	90 - 265	90 - 265	90 - 265	90 - 265	90 - 265	90 - 265
Operating temperature		°C -30 ... +70	-30 ... +70	-30 ... +70	-30 ... +70	-30 ... +70	-30 ... +70	-25 ... +50
Dimensions		cm 34.7 x 15.2 x 8.7	34.7 x 15.2 x 8.7	34.7 x 15.2 x 8.7	35.4 x 15.2 x 8.7	47.0 x 15.2 x 8.7	47.0 x 15.2 x 8.7	35.5 x 35 x 5



Example d'application

- 2 satellites and 20 users

