



Points d'accès utilisateur


Éléments de distribution passifs.

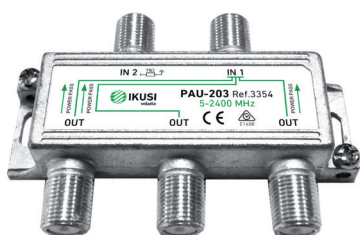


PAU-203

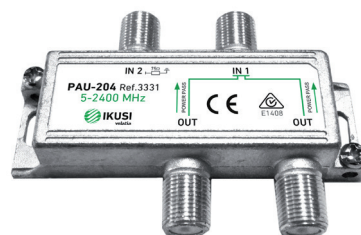


PAU-204

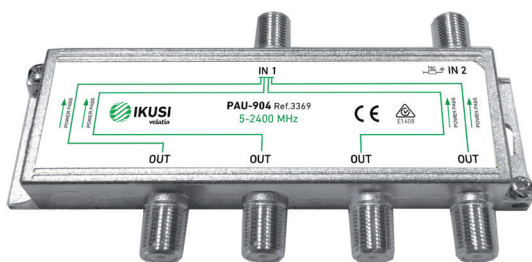


PAU-904

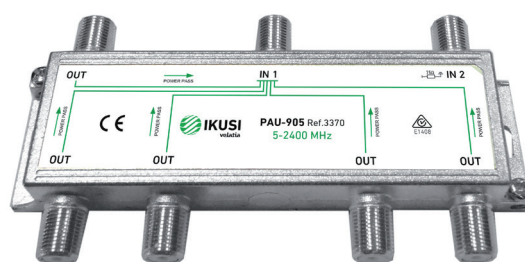

PAU-905

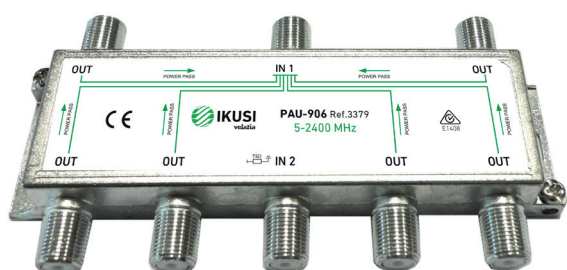

PAU-906

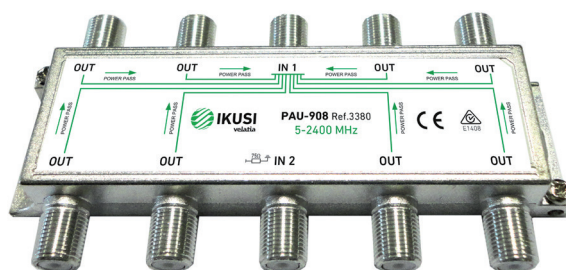

PAU-908

Caractéristiques générales

MODÈLE			PAU-204	PAU-203	PAU-904	PAU-905	PAU-906	PAU-908
RÉF.			3331	3354	3369	3370	3379	3380
Nombre de sorties			2	3	4	5	6	8
Bande de fréquences		MHz	5-2400					
Affaiblissement de distribution	5-862 MHz	dB	≤5.0	≤8.0	≤9.5	≤12.5	≤13.0	≤13.5
	950 -1550 MHz		≤5.0	≤9.0	≤10	≤14.0	≤14,5	≤15.5
	1551-2150 MHz		≤7.0	≤11.0	≤11,5	≤17.0	≤17.5	≤18.0
	2150-2400 Mhz		≤6.7	≤11.2	≤13	≤17.5	≤18.0	≤19
Protection entre sorties	5-862 MHz	dB	≥19	≥20	≥20	≥20	≥20	≥20
	950-1550 MHz		≥19	≥20	≥20	≥20	≥20	≥20
	1551-2150 MHz		≥19	≥20	≥20	≥20	≥20	≥20
	2150-2400 Mhz		≥18	≥18	≥18	≥18	≥18	≥18

- Pour sélectionner l'un des deux câbles du réseau de dispersion et diriger le signal vers 2, 3, 4, 5, 6 ou 8 portes de sortie.
- Boîte en zinc nickelé.
- Mise à terre.
- Connexion femelle F.

Exemple d'application

