

2-way Tap-offs

UDL210

REF. 3244

UDL215


REF. 3245

UDL220

REF. 3232

UDL225

REF. 3233

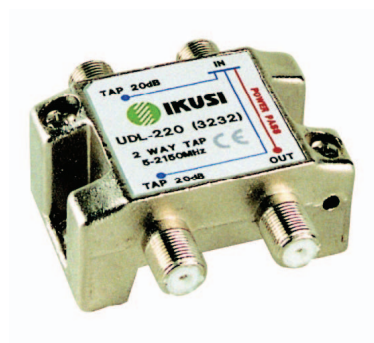

- Frequency range: 5-2300 MHz.
- Wall fixing, nickle-plated zinc diecast housing (2 screws attached).
- Grounding facilities.
- All ports F female connector.
- DC tansit (max +24 V_{DC}, 0.5 A) on the main line.

		UDL-210	UDL-215	UDL-220	UDL-225
Tap loss (± 0.7 dB)	dB	10	15	20	25
Through loss	5 – 862 MHz	≤ 2.3	≤ 1.6		≤ 1.1
	950 – 1550 MHz	≤ 3.0	≤ 2.0		≤ 1.9
	1551 – 2300 MHz	$\leq 3,7$	≤ 2.6	≤ 2.6	≤ 2.5
Directional isolation	5 – 300 MHz	≥ 26	≥ 29	≥ 31	≥ 35
	301 – 862 MHz	≥ 26	≥ 27	≥ 29	≥ 32
	950 – 2300 MHz	≥ 20	≥ 22	≥ 26	≥ 28
Tap-to-tap isolation	5 – 300 MHz	≥ 38	≥ 39	≥ 46	≥ 50
	301 – 862 MHz	≥ 35	≥ 37	≥ 42	≥ 45
	950 – 2300 MHz	≥ 28	≥ 37	≥ 39	≥ 35
Return loss	dB	≥ 12 (TV) ≥ 10 (SAT)	≥ 14 (TV) ≥ 10 (SAT)	≥ 12 (TV) ≥ 10 (SAT)	≥ 12 (TV) ≥ 10 (SAT)
Dimensions	mm	54 x 58 x 26			