



## Apartament amplifiers ATP-490 series

Models for terrestrial and satellite signals, adapted to the 1st and 2nd Digital Dividend.



Designed for installations with satellite signal

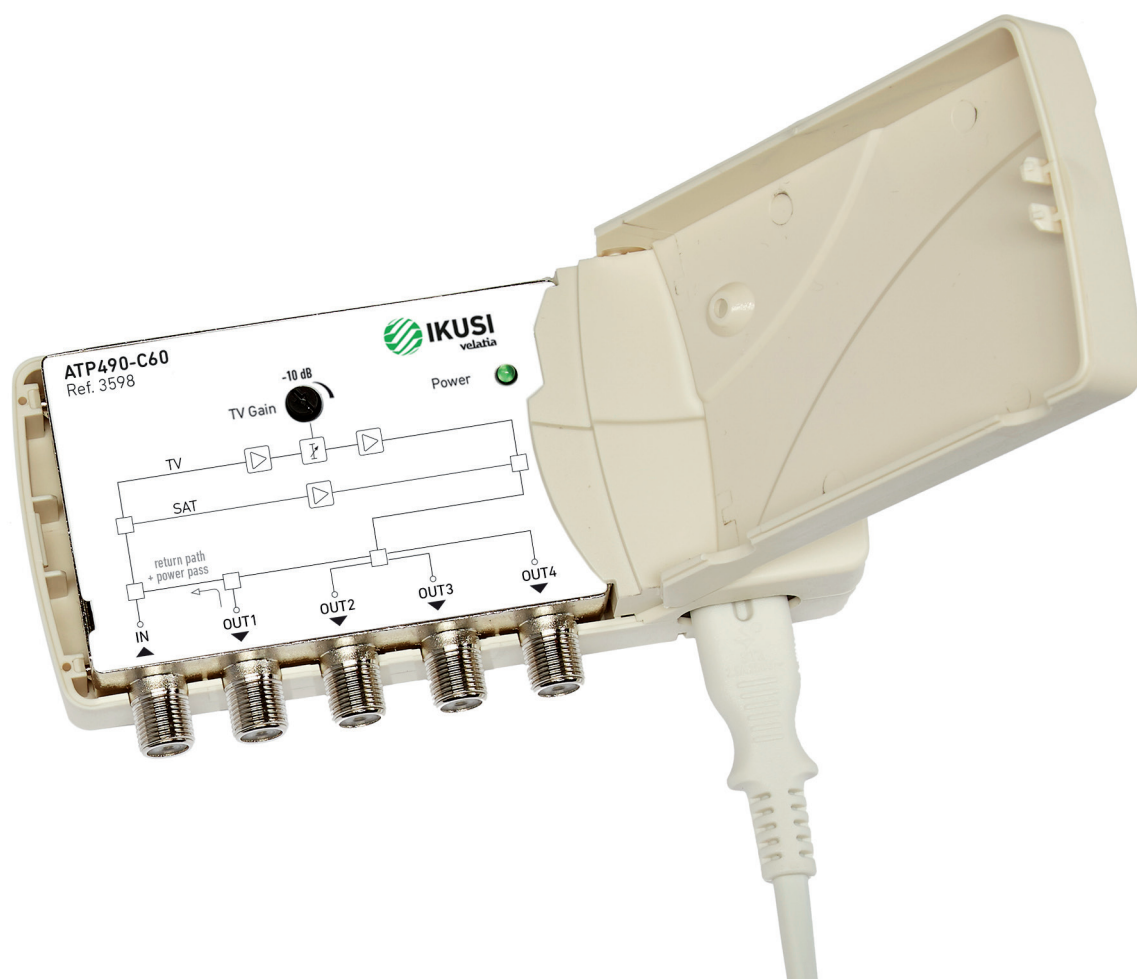

Models adapted to the 1st and 2nd Digital Dividend




Using passive return

## Main features

- Models adapted to the 1st and 2nd Digital Dividend.
- Terrestrial and satellite outputs.
- Gain adjustment potentiometers.
- Return path.
- DC transit OUT1.

MODEL	REF.	ATP-490 series	
ATP-490-C69	3597	Frequencies MHz	47 - 862
ATP-490-C60	3598		47 - 790
ATP-490-C48	3599		47 - 694
Input			1
Outputs			4
Gain	dB	Terr: >10	Sat: >14
Gain adjustment	dB	Terr: >10	-
Output level	dBμV	Terr: 99 IMD3 -60dB (DIN 45004B)	Sat: 105 IMD3 -35dB (EN 50083-3)
Return path frequency	MHz	5 - 30 (OUT1)	
Noise figure	dB	<6	<7
Mains supply voltage	VAC	100 - 240	
DC transit	mA	500 (OUT1)	
Consumption	W	<3	
Dimensions	mm	135 x70 x 30	

## Installation example

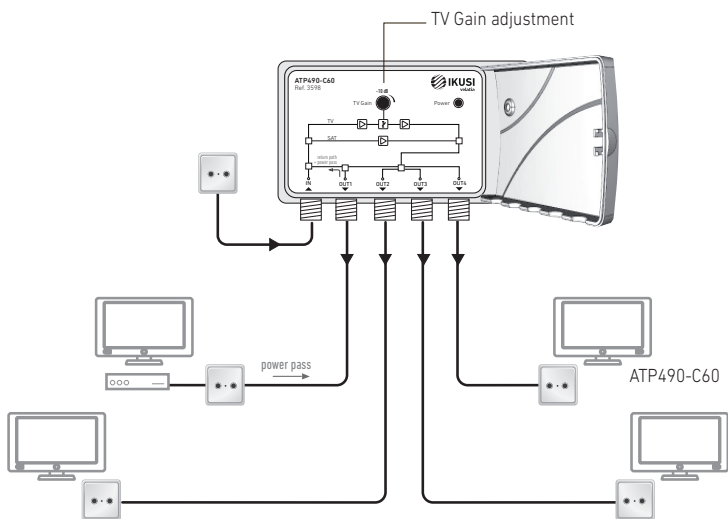

## Quick Fix & Release bracket

