


# PAUF-1xxD Series USER TERMINAL BOX WITH 2 PORTS+PIGTAIL CONNECTORIZED AT ONE END



MODEL	PAUF-110D	PAUF-115D	PAUF-120D	PAUF-125D	PAUF-130D	PAUF-140D	PAUF-155D	PAUF-170D
REF.	8002	8003	8004	8005	8006	8007	8008	8009
Cable length	10 mts	15 mts	20 mts	25 mts	30 mts	40 mts	55 mts	70 mts

## 1. Presentation

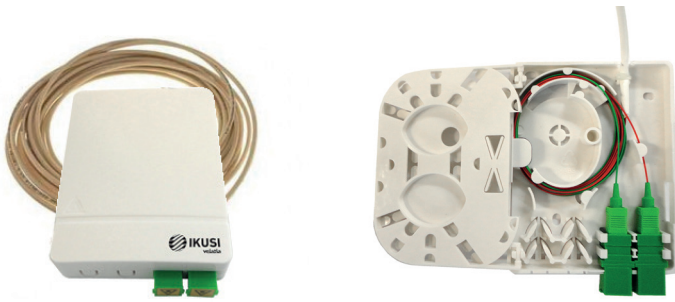

- Specially designed pigtail for FTTH
- Includes a user terminal box with SC/SC APC connectors and adapters
- The cable used is of type CFA-002D with two tight fibres and tensile strength >450 N
- Available in different lengths: 10, 15, 20, 25, 30, 40, 55 and 70 mts of cable outside



## 2. Package contents



**Step 1: Open the packaging**  
Cut the packaging to remove the end of the cable




- FTTH user terminal box kit, 2 ports and fusion tray with APC SC connectors and adapters + connectorised patch cord.
- Cardboard reel for easy removal of cable of different lengths, without having to remove the reel from the packaging.
- Accessories:  
3 screw and plug


## 3. Cable preparation



**Step 2: Close the packaging**  
Pull the cable, attach it to the guide and insert it into the flexible tube




**Step 3: Prepare the cable**  
After piping, cut the mesh below the mesh fold



**Step 4: Prepare the connector**  
Clamp the fibres and pull the mesh back. Ready to connect to the adapters

## 4. Wall mounting of the box



3 holes for attaching the rosette to the wall

**Standard**  
ITU-T-G-657 A2 - EN-188000  
TIA/EIA 455-220 - IEC 60793-2-50  
IEC793-2 ty A1 - IEC-TS 61941  
IEC-60794-1-2 E1,3,4,6,7,11,F5