


Serie **ATP200** **AMPLIFICADORES DE APARTAMENTO**
APARTMENT AMPLIFIERS
AMPLIFICATEURS D'APPARTEMENT


MODELO MODEL MODÈLE	REF.	Serie ATP200	
ATP200-C69	3583	Frecuencias Frequency Fréquences	47 - 862 MHz
ATP200-C60	3434		47 - 790 MHz (1º dividendo)
ATP200-C48	3584		47 - 694 MHz (2º dividendo)
Número de salidas RF Nº of RF output Nombre de sorties HF			2
Ganancia Gain Gain	dB		25
Regulación de la ganancia Gain adjustment Réglage de gain	dB		15
Nivel de salida (IM3 -60dB, DIN 45004B) Output level Niveau de sortie	dBµV		(2x) 103
Figura de ruido Noise figure Facteur de bruit	dB		<4
Tensión de red (50/60 Hz) Mains supply voltage Tension secteur	VAC		100 - 240
Consumo Consumption Consommation	W		<1,5
Dimensiones Dimensions	mm		90 x 58 x 27

FIJACIÓN A LA PARED
 FIXING TO THE WALL
 FIXATION AU MUR

1. Pegar percha en la pared
 Fix hanger on the wall
 Fixe le support mural



2. Taladrar y atornillar (opcional)
 Drill and screw (optional)
 Perforer et visser (optionnel)



3. Colocar el amplificador
 Place amplifier
 Acrocher l'amplificateur

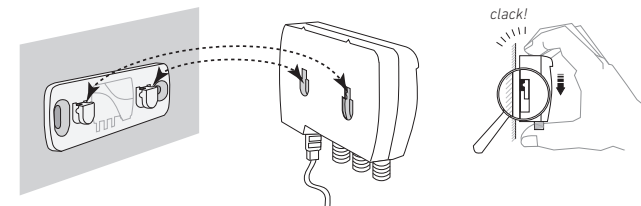


DIAGRAMA DE APLICACIÓN
 APPLICATION DIAGRAM
 DIAGRAMME D'APPLICATION

