

Apartment amplifiers for VHF and UHF signals.  
It has 2 outputs.



TV input



Models adapted to the 1st and 2nd  
Digital Dividend



Gain adjustment




Two RF outputs

## Main features


- Models adapted to the 1st and 2nd Digital Dividend.
- TV amplifier.
- 1 RF input — 2 RF outputs.
- Gain with adjustment potentiometer.
- Mains powered, 50/60 Hz. Mains lead with bipolar plug.
- External plastic box. F type connection. It has an adapter for easy attachment to wall.

MODEL	REF.	Serie ATP-200	
ATP-200-C69	3583	Frequency range MHz	47 - 862
ATP-200-C60	3434		47 - 790 (1 <sup>st</sup> dividend)
ATP-200-C48	3584		47 - 694 (2 <sup>nd</sup> dividend)
Inputs			1
Outputs			2
Gain	dB		25
Gain adjustment	dB		15
Output level	dBµV		103
Noise figure	dB		<4
Mains supply voltage	VAC		100 - 240
Consumption	W		<1,5
Dimensions	mm		90 x 58 x 27

Graphs of gain control

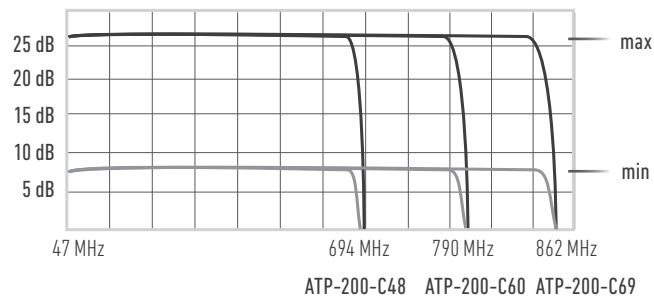

## Example d'application

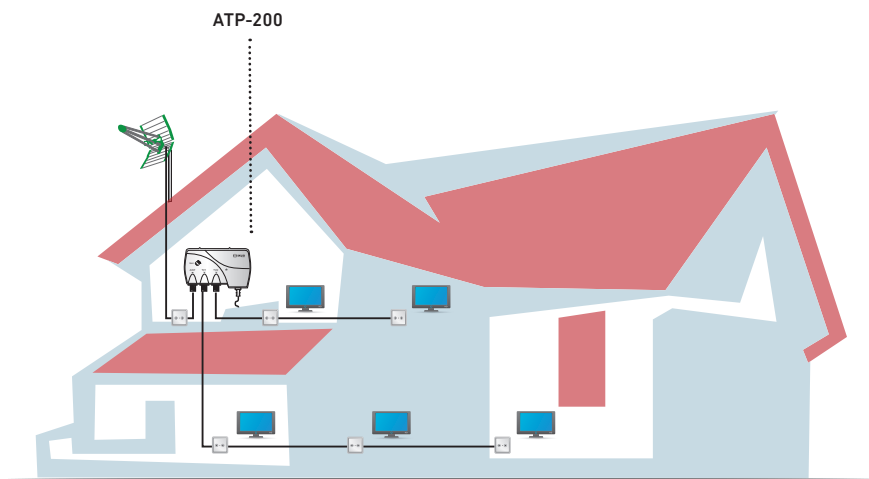

## Quick Fix & Release bracket

